

**SPRO**<sup>®</sup>

# DHD40/2713RV-W

4 Megapixel IR Dome Camera



4 MEGAPIXEL



2.7 ~ 13.5 MM



30m IR



IP67



VANDAL PROOF



## Key Features:

- 4MP@25fps
- 2.7~13.5mm vari-focal lens
- Max. IR distance 30m
- Smart IR
- WDR
- IK10, IP67 waterproof
- DC12V



## SPECIFICATIONS

<b>Model Number</b>	DHD40/2713RV-W
<b>Image Sensor</b>	1/3" CMOS
<b>Effective Pixels</b>	2688(H)×1520(V), 4MP
<b>Scanning System</b>	Progressive
<b>Electronic Shutter Speed</b>	1/25~1/100000s
<b>Min. Illumination</b>	0.03Lux/F1.3, 30IRE, 0Lux IR on
<b>S/N Ratio</b>	More than 65dB
<b>Max. IR LEDs Length</b>	Up to 30m
<b>IR On/Off Control</b>	Auto/ Manual
<b>IR LEDs</b>	2

(continued)

## Lens

<b>Lens Type</b>	Vari-focal lens
<b>Mount Type</b>	Board-in
<b>Focal Length</b>	2.7-13.5mm
<b>Max Aperture</b>	F1.3
<b>Angle of View</b>	H:98°~26°
<b>Focus Control</b>	Manual

## Pan/Tilt/Rotation

<b>Pan/Tilt/Rotation Range</b>	Pan:0°~355° / Tilt: 0° ~ 75° / Rotation: 0° ~ 355°
--------------------------------	--

## Video

<b>Resolution</b>	4MP (2560x1440)
<b>Frame Rate</b>	25@4MP, 25fps@1080P, 25fps@720P
<b>Video Output</b>	1-channel BNC HD-CVI video output
<b>Day/Night</b>	Auto (ICR) / Manual
<b>OSD Menu</b>	Multi-language
<b>BLC Mode</b>	BLC / HLC / DWDR
<b>WDR</b>	DWDR
<b>Gain Control</b>	AGC
<b>Noise Reduction</b>	2D
<b>White Balance</b>	Auto / Manual
<b>Smart IR</b>	Auto / Manual



## Interface

<b>Audio Interface</b>	N/A
------------------------	-----

## General

<b>Power Supply</b>	12V DC ±25%
<b>Power Consumption</b>	Max 4.1W (12V DC, IR on)
<b>Operating Conditions</b>	-40°C ~ +60°C / Less than 90% RH
<b>Storage Conditions</b>	-40°C ~ +60°C / Less than 90% RH
<b>Ingress Protection</b>	IP67

<b>Casing</b>	Aluminium
<b>Dimensions</b>	Φ122mm×88.9mm (Φ4.8"×3.5")
<b>Net Weight</b>	0.39kg (0.86lb)
<b>Gross Weight</b>	0.49kg (1.08lb)

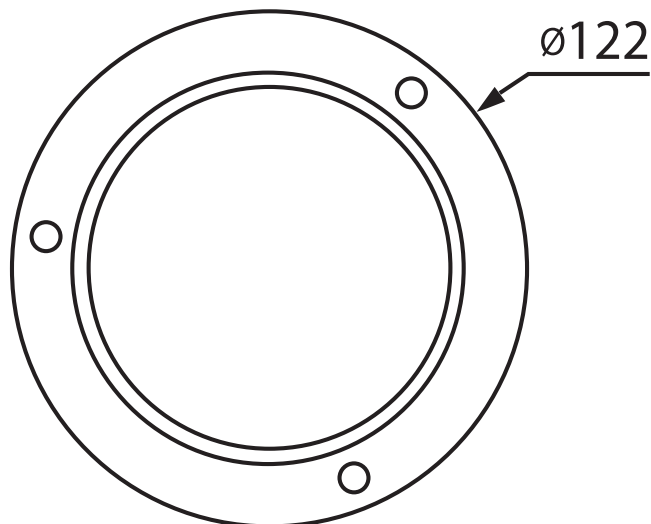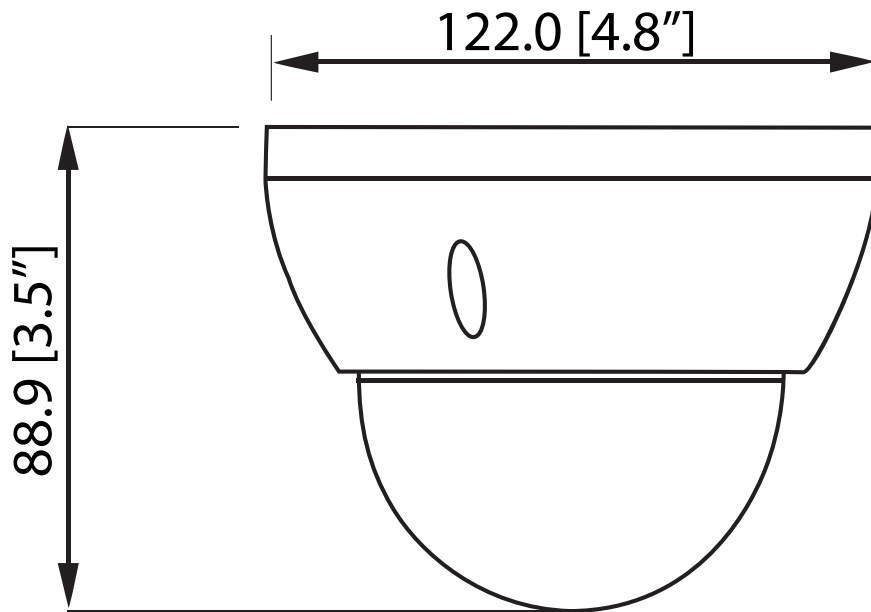

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved