


## NEC MultiSync® X401S

LCD 40" Professional Large Format Display

# Datasheet

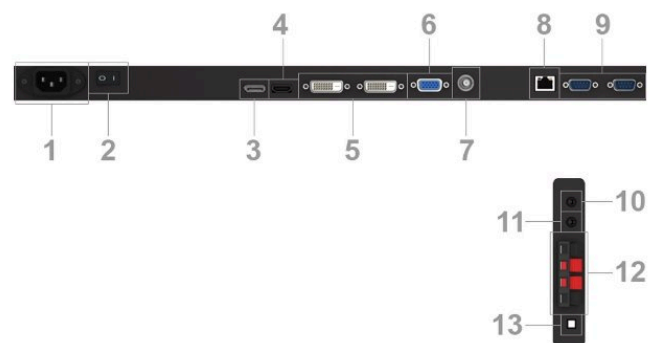

The superslim MultiSync® X401S delivers the longevity and reliability customers expect from a Public Display thanks to a professional Public Display panel and proven NEC engineering excellence. The reduced depth and light weight makes it easy to handle and integrate while the new slim option slot STv2 allows for the integration of powerful slot-in PCs and other option slot products.

Ideal for a wide array of applications such as retail signage including 24/7, transport applications, conference rooms, lobby/reception installations and integration in totems and furniture.

## Benefits

**Super slim design** - only 43.3 mm total depth.

**Programmable Ambient Light Sensor** - automatically adapts brightness to suit ambient light conditions ensuring reduced power consumption and eye pleasing luminosity levels.

**DICOM support** - for medical applications.

**Colour Calibration** - the display can be hardware colour calibrated to make sure e.g. customer's logo are displayed accurately.

**Unique NEC heat management** - enables the user to monitor and control the heat inside the display with user controllable fans. Heat management is crucial for larger walls and mission critical installations to secure reliability and longevity.

## Product Information

Product Name	NEC MultiSync® X401S
Product Group	LCD 40" Professional Large Format Display
Order Code	60003327

## Display

Panel Technology	S-PVA with edge LED backlights
Active Screen Area (W x H) [mm]	885.6 x 498.2
Screen Size [inch/cm]	40 / 102
Aspect Ratio	16:9
Brightness [cd/m <sup>2</sup> ]	700, 420 Eco (shipment setting)
Contrast Ratio (typ.)	3500:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	8 (grey-to-grey)
Panel Refresh Rate [Hz]	60
Haze Level [%]	44
Supported Orientation	Face Up <sup>1</sup> ; Landscape; Portrait

## Resolution

Native Resolution	1920 x 1080 at 60 Hz			
Supported Resolutions	1024 x 768; 1280 x 1024; 1280 x 720; 1280 x 768;	1280 x 800; 1280 x 960; 1366 x 768; 1400 x 1050;	1600 x 1200; 1680 x 1050; 1920 x 1080; 640 x 480;	720 x 400; 720 x 576; 800 x 600
Supported on digital inputs (Video)	1280 x 720p (50)16:9; 1280 x 720p (59.94/60)16:9; 1920 x 1080i (50)16:9;	1920 x 1080i (59.94/60)16:9; 1920 x 1080p (23.97/24)16:9; 1920 x 1080p (25)16:9;	1920 x 1080p (29.97/30)16:9; 1920 x 1080p (50)16:9; 1920 x 1080p (59.94/60)16:9;	720 x 480p (59.94/60)16:9; 720 x 576p (50)16:9

## Synchronisation Rate

Horizontal Frequency [kHz]	31.5 - 91.1
Vertical Frequency [Hz]	50 - 85

## Connectivity

Input Video Analogue	1 x D-sub 15 pin; Composite (BNC)
Input Video Digital	1 x DisplayPort (with HDCP); 1 x DVI-D (with HDCP); 1 x HDMI (with HDCP)

Input Audio Analogue	1 x 3,5 mm jack
Input Audio Digital	1 x HDMI; DisplayPort
Input Control	LAN 100Mbit; RS232
Output Video Digital	1 x DVI-D (with HDCP)
Output Audio Analogue	3,5mm jack
Output Control	RS232
Remote Control	LAN with SNMP; Remote Control IR; RS-232C (9-pin D-sub) Input and Output

### Option Slot

Slot Technology	STv2 (compatible with Intel / NEC OPS standard)
Inrush Current [A]	max. 10
Power Consumption [W]	max. 61
Voltage / Current [V/A]	16/4

### Electrical

Power Consumption [W]	110 Eco (shipment setting), 140
Power Savings Mode [W]	< 0.5 (ECO Standby); < 1
Power Management	VESA DPMS

### Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 90
Storage Temperature [°C]	-20 to +60

### Mechanical

Dimensions (W x H x D) [mm]	Without stand: 925.1 x 537.1 x 43.3
Weight [kg]	Without stand: 14.9
Bezel Width [mm]	18 (left and right); 18 (top and bottom)
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
Ingress Protection	IP40 (front); IP20 (back)

### Available Options

Accessories	Feet (ST-322); Speaker (SP-RM2); Wall mount (PDW S 32-55 L and P)
Option Slot	Built-in PC; HD-SDI board

## Regulatory

Safety and Ergonomics	C-tick; CE; Energy Star 5.1; FCC Class A; PSB; RoHS; TÜV GS; UL/C-UL or CSA; VCCI
-----------------------	---

## Green Features

Energy Efficiency	Ambient light sensor; Annual energy consumption: 161 kWh (based on 4 operating hours per day); Carbon savings meter; ECOMode; Energy efficiency class: C; LED backlight
Ecological Materials	Manuals on CD; Mercury free; Optional feet
Ecological Standards	Energy Star 5.1

## Additional Features

Special Characteristics	Advanced fan control; Automatic Alarm E-Mails; Copy display settings through RS232; DICOM Simulation; Hardware colour calibration possible; Input name adjustment; Matrix memory; NaViSet Administrator 2 - free download; OSD rotation for portrait mode; Programmable ambient light sensor; Rapid input switching; Scheduler; Screen saver functions; TileMatrix (10 x 10); User input priority definition; Various picture in picture options
Colour Versions	Black Front Bezel, Black Back Cabinet
Audio	Integrated Speakers (5 W + 5 W); Optional speakers NEC SP-RM2 (2x15W)
Plug and Play	VESA DDC2Bi
Shipping Content	Display; Free LAN control software (download); Power Cable; Remote Control (IR); slot cover for STv2; VGA cable
Warranty	additional services available; optional 4. + 5. year warranty extension <sup>2</sup>
Operating Hours	24/7

<sup>1</sup> adjusted usage conditions for face up/down installations, please refer to operational guidelines or contact our support

<sup>2</sup> please refer to terms and conditions of warranty extensions



C-tick



CE



Energy Star 5.1



RoHS



TÜV GS



VCCI



FCC Class A

This document is © 2025 Sharp NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 25.02.2025